



## FITTING INSTRUCTIONS FOR FORD RANGER PX NUDGE BAR

TUFF BULLBARS AUSTRALIA,  
5-7 Holt Drive, (P.O. Box 1977)  
Torrington,  
Toowoomba,  
Queensland 4350,  
AUSTRALIA



Ph: **1300 BE TUFF** (1300 23 88 33)  
Fax: 07 4633 1236  
[sales@tuffbullbars.com.au](mailto:sales@tuffbullbars.com.au)  
[admin@tuffbullbars.com.au](mailto:admin@tuffbullbars.com.au)  
[feedback@tuffbullbars.com.au](mailto:feedback@tuffbullbars.com.au)  
[www.tuffbullbars.com.au](http://www.tuffbullbars.com.au)

### FORD RANGER PX NUDGE BAR - BOLT KIT

|    |                   |
|----|-------------------|
| 4  | 90mm x 10mm Bolts |
| 4  | 40mm x 10mm Bolts |
| 16 | 10mm Flat Washers |
| 8  | 10mm Nylock Nuts  |
| 2  | Brackets          |

[www.tuffbullbars.com.au](http://www.tuffbullbars.com.au)

**1300 BE TUFF**

**TUFF BY NAME \* TUFF BY NATURE**

**AUSTRALIA'S LEADING BULLBAR  
MANUFACTURER**







## FITTING INSTRUCTIONS FOR FORD RANGER PX NUDGE BAR



Remove grill  
and bumper

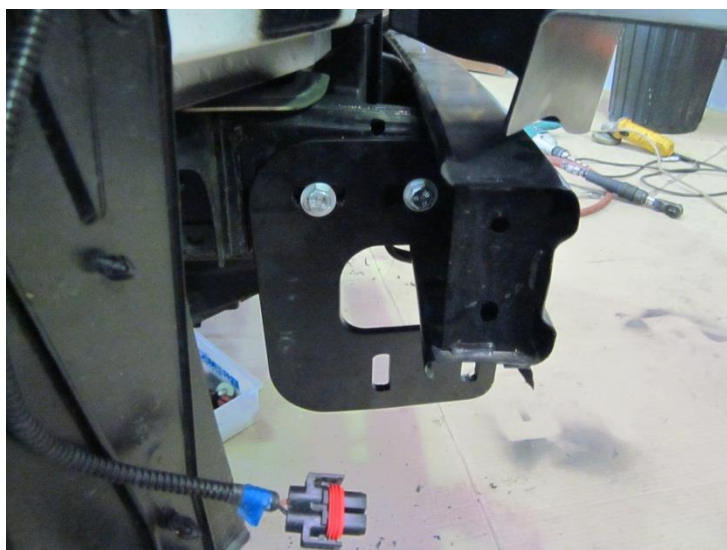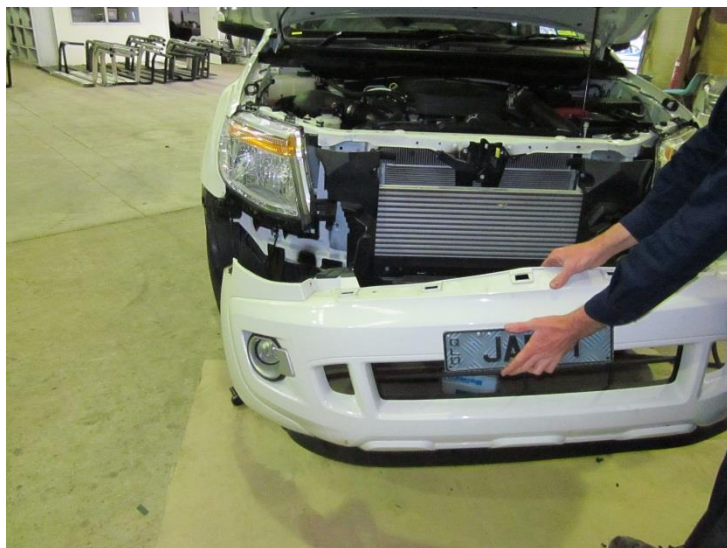

Attach brackets on the  
side of chassis with 1 x 90  
x 10 bolt through the  
existing hole in the chassis  
and mark and drill second  
hole. Bolt to chassis using  
90 x 10mm Flat washers  
and nylock nuts.



## FITTING INSTRUCTIONS FOR FORD RANGER PX NUDGE BAR



Refit bumper and the grill with brackets exposed out of the bottom of the bumper.



Attach nudge bar to the brackets using 40 x 10mm bolts, flat washers and nylocks provided.

Use the spot light tags to level the nudge bar.





## FITTING INSTRUCTIONS FOR FORD RANGER PX NUDGE BAR



PLEASE DON'T HESITATE TO CALL US ON **1300 BE TUFF** (1300 23 88 33) IF YOU  
HAVE ANY PROBLEMS WITH FITTING

BEST REGARDS, THE TUFF TEAM! ☺